



## STANDARD FEATURES

- Piezo switch technology with stainless steel buttons (zero and units)
- Large, bold 0.8in LED display
- NEMA 4X stainless steel enclosure
- Status annunciators: lb, kg, oz, g, negative, motion, center of zero
- Displays units in decimals lb, kg, oz, lb & oz and grams
- One full duplex RS-232 port
- Two digital inputs for remote zero, print and units
- Prevent™ breather vent

## APPROVALS



## SPECIFICATIONS

### DISPLAY:

6-digit Light Emitting Diode (LED) display  
7-segment, 0.8in (20mm) digits

### EXCITATION:

10VDC 4 x 350Ω load cells

### MEASUREMENT RATE:

15, per second

### DISPLAY RESOLUTION:

10,000 dd maximum

### POWER CONSUMPTION:

115 VAC @ 70 mA,  
or 230VAC @ 35 mA, 50-60Hz

### DIGITAL INPUTS:

Two inputs, TTL or switch closure, active-low

### SERIAL COMMUNICATIONS:

Full duplex RS-232, 9600, 4800, 2400, 1200  
bps; 7 or 8 databits, even, off, or no parity

### OPERATING TEMPERATURE:

14°F to 104°F (-10°C to 40°C)

### STORAGE TEMPERATURE:

14°F to 122°F (-10°C to 50°C)

### ENCLOSURE DIMENSIONS:

9.5in x 6.0in x 2.75in  
(241 mm x 152 mm x 70 mm)

### WEIGHT:

10lb (4.5kg)

### RATING MATERIAL:


NEMA 4X/IP66, stainless steel

### APPROVALS:

NTEP - CC# 00-045 at 10,000 Divisions,  
Class III/IL

### WARRANTY:

Two-year limited warranty

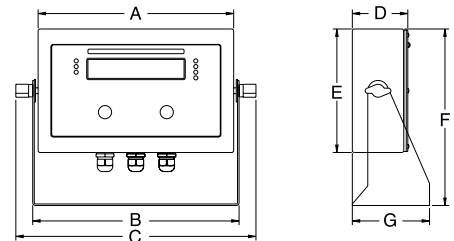

DIMENSIONS			
<b>A</b>	9.50in (241.22mm)	<b>E</b>	6.00in (152.4mm)
<b>B</b>	10.03in (254.7mm)	<b>F</b>	8.58in (217.9mm)
<b>C</b>	11.67in (296.4mm)	<b>G</b>	3.75in (95.2mm)
<b>D</b>	2.69in (68.3mm)		

## PART # DESCRIPTION

65137.....	IQ plus 210, 115VAC.....	10lb .....
65138.....	IQ plus 210, 230VAC.....	10lb .....

## EST. SHIP WEIGHT

## OPTIONS/ACCESSORIES

64640.....	Additional operating manual.....
------------	----------------------------------

\*If ordering the two non-tactile buttons or column without a scale, refer to the replacement parts catalog for part number and pricing