


RL2200 Series



Available in configuration with three or four mounting assemblies.

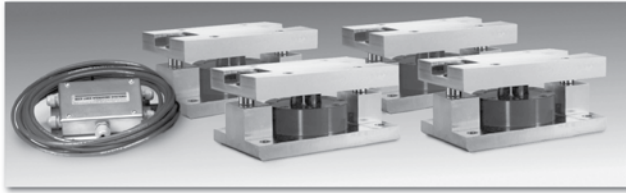


STANDARD FEATURES

- Capacities: 2500-50,000lb (1134-22,680kg)
- Low-profile design
- High 4mV/V output (2mV/V, 2500lb)
- Self-centering in all directions—able to withstand excessive side loads
- Self-checking assembly

Complete Kit Includes:

- 1 JB4SS NEMA 4X stainless steel signal-trim junction box
- 3 or 4 RL2200 high alloy, zinc-plated steel mounting assemblies
- 3 or 4 RL2200 compression disk load cells
- 25ft of our Hostile Environment EL147HE SURVIVOR® load cell cable

SPECIFICATIONS

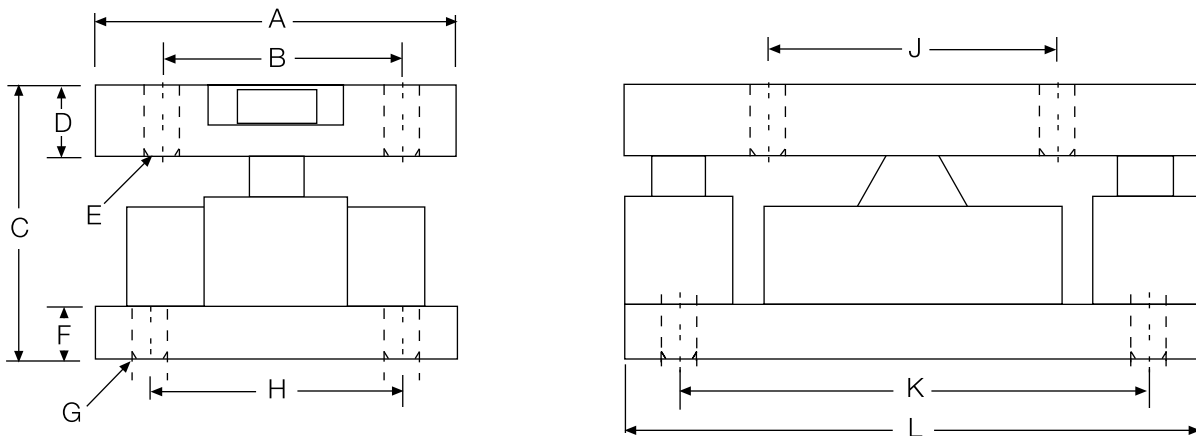

DIMENSIONS

| RATED CAPACITY lb/inches | A | B | C | D | E | F | G | H | J | K | L |
|-----------------------------|-------|-------|-------|------|------|------|------|-------|-------|-------|-------|
| 2500-10,000 | 5.0 | 3.50 | 4.00 | 1.00 | .52 | 1.0 | .52 | 3.50 | 4.00 | 6.50 | 8.0 |
| 25,000-50,000 | 6.0 | 4.50 | 5.00 | 1.25 | .78 | 1.0 | .78 | 4.50 | 5.00 | 7.75 | 10.0 |
| RATED CAPACITY kg/mm | A | B | C | D | E | F | G | H | J | K | L |
| 1134-4536 | 127.0 | 88.9 | 101.6 | 25.4 | 13.2 | 19.0 | 13.2 | 88.9 | 101.6 | 165.1 | 203.2 |
| 11,340-22,679.6 | 152.4 | 114.3 | 127.0 | 31.7 | 19.8 | 25.4 | 19.8 | 114.3 | 127.0 | 196.8 | 254.0 |

LOAD RATING**PART #****Single Module (includes load cell)**

| | |
|----------------------------|-------------|
| 2500lb (1134 kg) | 76656 |
| 5000lb (2268 kg) | 45849 |
| 10,000lb (4536 kg) | 45848 |
| 25,000lb (11,340 kg) | 45847 |
| 50,000lb (22,680 kg) | 45846 |

3-Module Kit

| | |
|----------------------------|-------------|
| 2500lb (1134 kg) | 76897 |
| 5000lb (2268 kg) | 42811 |
| 10,000lb (4536 kg) | 42812 |
| 25,000lb (11,340 kg) | 42813 |
| 50,000lb (22,680 kg) | 42814 |

4-Module Kit

| | |
|----------------------------|-------------|
| 2500lb (1134 kg) | 76898 |
| 5000lb (2268 kg) | 42815 |
| 10,000lb (4536 kg) | 42816 |
| 25,000lb (11,340 kg) | 42817 |
| 50,000lb (22,680 kg) | 42818 |

C&M Scale
7241 W. Roosevelt Rd
Forest Park IL 60130
Sales, Service & Rentals

Toll Free: (800) 243-3721
Phone: (708) 771-0100
Fax: (708) 771-0196
www.cmscale.com